



**C 300H**  
**C 300H x4**  
**C 350H**  
**C 350H x4**



[www.ausa.com](http://www.ausa.com)

**AUSA - Automóviles Utilitarios, S.L.** ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: [ausa@ausa.com](mailto:ausa@ausa.com)




(Sede central AUSA-Manresa)

**AUSA MADRID** ● Pol. Ind. Coslada-Marconi 15-17, 28820 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: [ausa.madrid@ausa.com](mailto:ausa.madrid@ausa.com)  
**AUSA FRANCE** ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: [ausa.france@ausa.com](mailto:ausa.france@ausa.com)  
**AUSA UK** ● Unit 16 Hollows Works - Shawclough Road - Rochdale - Lancs OL12 6LN (U.K.) Tel.: +44 (0) 1706 64 96 91 E-mail: [ausa.uk@ausa.com](mailto:ausa.uk@ausa.com)  
**AUSA DEUTSCHLAND GmbH.** ● Heinrich - Welken Straße 5, 59069 HAMM - RHYNERN (GERMANY) Tel.: +49 2385922245 E-mail: [ausa.deutschland@ausa.com](mailto:ausa.deutschland@ausa.com)  
**AUSA CORPORATION** ● 2655 Le Jeune Road - Suite 808, CORAL GABLES FL 33134 (USA) Toll free: 1 800 820 AUSA E-mail: [ausa.corp@ausa.com](mailto:ausa.corp@ausa.com)  
**BEIJING REPRESENTATIVE OFFICE** ● Address Room 527, HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - Beijing 100026 CHINA  
 Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: [ausa.china@ausa.com](mailto:ausa.china@ausa.com)

**C 300H\_3000 Kg**  
**C 350H\_3500 Kg**



DIMENSIONS (mm)	C 300 H	C 300 H x4	C 350 H	C 350 H x4
A	2200	2200	2240	2240
B	250	220	250	220
C	325	325	380	380
D	1460	1460	1460	1460
E (narrow axle)	1510	1510	1690	1690
F (wide axle)	1870	1870	1950	1950
G	3500	4700	3500	4700
H	2850	3005	2850	3005
I	120	120	120	120
J	50	50	50	50
K	750	750	750	750
L	4500	4500	4500	4500
M	600	600	600	600
N	1950	1950	1950	1950
O	1200	1200	1200	1200
P	5800	6805	5800	6805

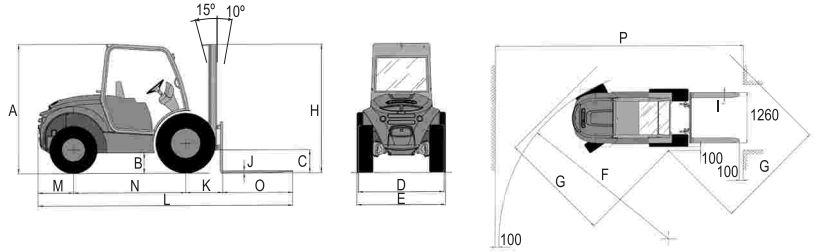

Type of mast	Maximum lifting height (mm)	Front axle	Free lift (mm)	Machine height with mast retracted (mm)				Machine height with mast extended (mm)				Load (Kg) at max. height			
				C 300 H	C 350 H	C300Hx4	C350Hx4	C 300H	C350H	C300Hx4	C350Hx4	C 300H	C350H	C300Hx4	C350Hx4
Duplex (Std.)	3300	Narrow /Wide (op.)	120	2440	2480	2440	2480	4500	4500	4500	4500	3000	3500	3000	3500
Duplex	4000	Narrow /Wide (op.)	120	2790	2830	2790	2830	5200	5200	5200	5200	2250	3000	2250	3000
Triplex (free lift)	3700	Narrow /Wide (op.)	1200	2090	2130	2090	2130	4900	4900	4900	4900	2400	3200	2400	3200
Triplex (free lift)	5400	Wide	1680	2657	2698	2657	2698	6600	6600	6600	6600	1500	1600	1500	1600
Triplex (free lift)	6780	Wide	2280	-	3200	-	3200	-	6870	-	6870	-	600	-	600

### TECHNICAL SPECIFICATIONS

	C 300H	C 300H x4	C 350H	C 350H x4
<b>Load capacity</b> (Centre of gravity at 500 mm) (Kg)	3000		3500	
<b>Lifting height</b> (Standard duplex mast) (mm)	3300			
<b>Engine</b>	Diesel (C300Hx4/350H/350Hx4) Turbodiesel (C300H) KUBOTA V 2003-T		KUBOTA V 3300-E2B	
Power acc./DIN 6270 B (KW/HP)	42,6 / 57,88 (2700 rpm)		45.4/61.7 (2400 rpm)	
Power acc./DIN 70020 (KW/HP)	46,3 / 62,9 (2700 rpm)		48.1/ 65.3 (2400 rpm)	
N° of cylinders	4			
Cubic capacity (cc)	1999		3318	
Cooling system	Water			
<b>Traction</b>	2	4	2	4
<b>Transmission</b>	Hydrostatic with variable flow pump and automatic regulation Electric gear inverter Inching pedal			
<b>Unladen weight</b> (Kg) (with full tanks)	5700		6000	
<b>Gradient negotiable</b> (with full load)	35%		32%	
<b>Speed</b> (Maximum) (Km/h)	20			
<b>Engine starting system</b>	Electric			
<b>Tyres</b>	Front	12,5/80-18	12,5/80-18	16/70-20
	Rear	27x10-12	10,0/75-15,3	27x10-12
<b>Steering</b>	Hydraulic. Working pressure 140 bar.			
<b>External turning circle</b> (mm)	3500	4700	3500	4700
<b>Tank capacity</b> (l)	Fuel	80		
	Hydraulic fluid	65		
<b>Service brake</b>	Oil-immersed, multidisc, hydraulically driven			
<b>Parking brake</b>	Oil-immersed, multidisc, hydraulically driven			
<b>Hydraulic circuit</b>	18-8 cc. double gear pump. Working pressure 170 bar		18-8 cc. double gear pump. Working pressure 190 bar	
<b>Operating pressures for accessories</b> (bar)	170		190	

### STANDARD EQUIPMENT

- Open cabin
- Ergonomic seat
- Seat belt
- Joystick
- Rotating beacon
- Side-shift
- Audible reverse warning

### OPTIONAL EQUIPMENT

- Semi-closed cabin
- Full cabin with heater
- Front and rear lights
- Wide front axle
- Catalytic converter
- Spark arrester
- Fuel oil filter with water separator
- 600, 800 and 1000 litre hydraulic buckets