



## Articulated Dumper


# D 150 AHA D 150 AHG



### TECHNICAL DATA

GENERAL		D150 AHA M713	D 150 AHG M712
Unloading system		High	Rotating
Load capacity	Kg	1500	1500
Chassis		Articulated and oscillating	Articulated and oscillating
Water hopper capacity	l	605	520
Level hopper capacity	l	681	626
Heaped hopper capacity	l	841	900
Empty weight	Kg	1510	1510
Transmission		Hydrostatic	Hydrostatic
ENGINE			
Brand		KUBOTA	KUBOTA
Model		D1105-E2B	D1105-E2B
Power	kW	16.8	16.8
Operating speed	rpm	2700	2700
Torque	Nm@rpm	72@2200	72@2200
No. of cylinders		3	3
Emissions		Stage IIIA - EPA Tier2	Stage IIIA - EPA Tier2
Noise	dB(A)	101	101
Consumption	l/h	4,6	4,6
CO <sub>2</sub>	Kg/h	12	12
DRIVING			
Max. speed	Km/h	14	14
Maximum gradient	%	40	40
External turning radius	mm	3260	3260
Traction		4x4	4x4
Tyres		10.0/75-15.3	10.0/75-15.3
HYDRAULIC SYSTEM			
Hydraulic circuit		8 cc gear pump	8 cc gear pump
Working pressure	bar	180	180
TANK CAPACITY			
Fuel	l	23	23
Hydraulic system	l	21.2	21.2
BRAKES			
Service		Sealed brakes. Mechanical drive	Sealed brakes. Mechanical drive
Parking		Sealed brakes. Mechanical drive	Sealed brakes. Mechanical drive

## DIMENSIONS

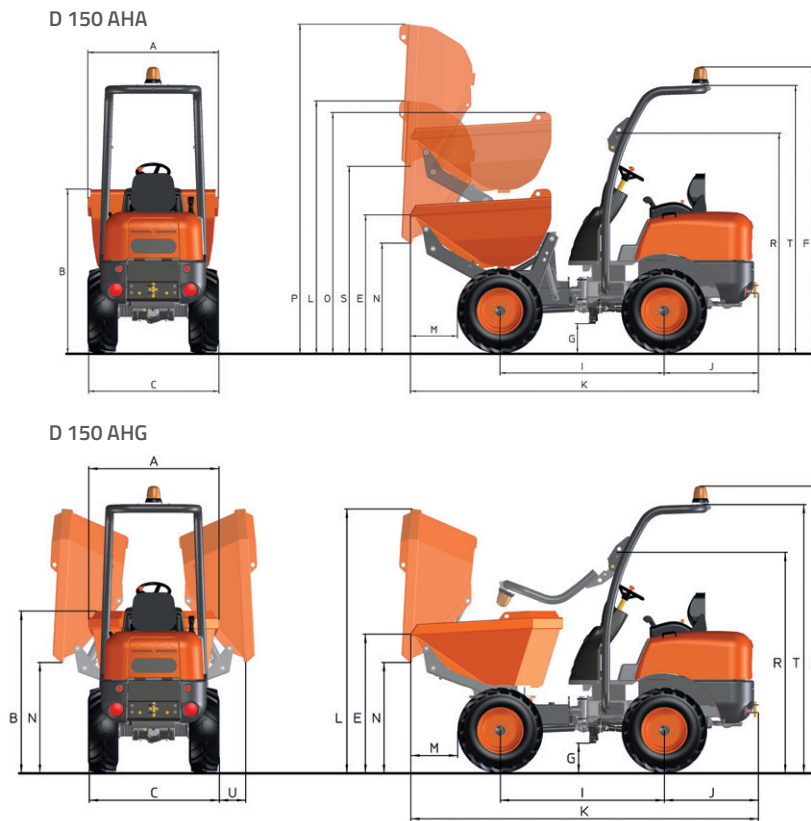

DIMENSIONS (mm)	D 150 AHA	D 150 AHG
A	1395	1390
B	1490	1475
C	1480	1470
E	1265	1260
F	2610	2560
G	265	250
I	1500	1600
J	860	860
K	3180	3245
L	2300	2500
M	420	450
N	1000	1010
O	2195	-
P	3000	-
R	2005	1990
S	1705	-
T	2440	2425
U	-	115



[www.ausa.com](http://www.ausa.com)

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.