




TECHNICAL DATA

GENERAL		DR902AHG
Unloading system	-	Rotating
Load capacity	kg	9000
Chassis	-	Articulated and oscillating
Water hopper capacity	l	2050
Level hopper capacity	l	3070
Heaped hopper capacity	l	3930
Empty weight	kg	5262
Transmission	-	Hydrostatic
ENGINE		
Brand	-	DEUTZ TD 2.9 L4 HT
Model	-	55,4
Power	kW	2200
Operating speed	rpm	320@1600
Torque	N-m@rpm	4
No. of cylinders	-	Stage V
Emissions	-	101
Injection	-	Common Rail and electronic management
Exhaust aftertreatment	-	DPF (Diesel particulate filter)
Noise	dB(A)	
DRIVING		
Max. speed	km/h	25
Maximum gradient	%	52
External turning radius	mm	6300
Traction	-	4x4
Tyres	-	500/60-22.5
HYDRAULIC SYSTEM		
Hydraulic circuit	-	Double gear pump
Flow rate	l/min	50
Working pressure	bar	180
TANK CAPACITY		
Fuel	l	60
Hydraulic system	l	55
BRAKES		
Service	-	Sealed brakes. Hydraulic drive
Parking	-	Negative brake and electro-hydraulic release

DIMENSIONS

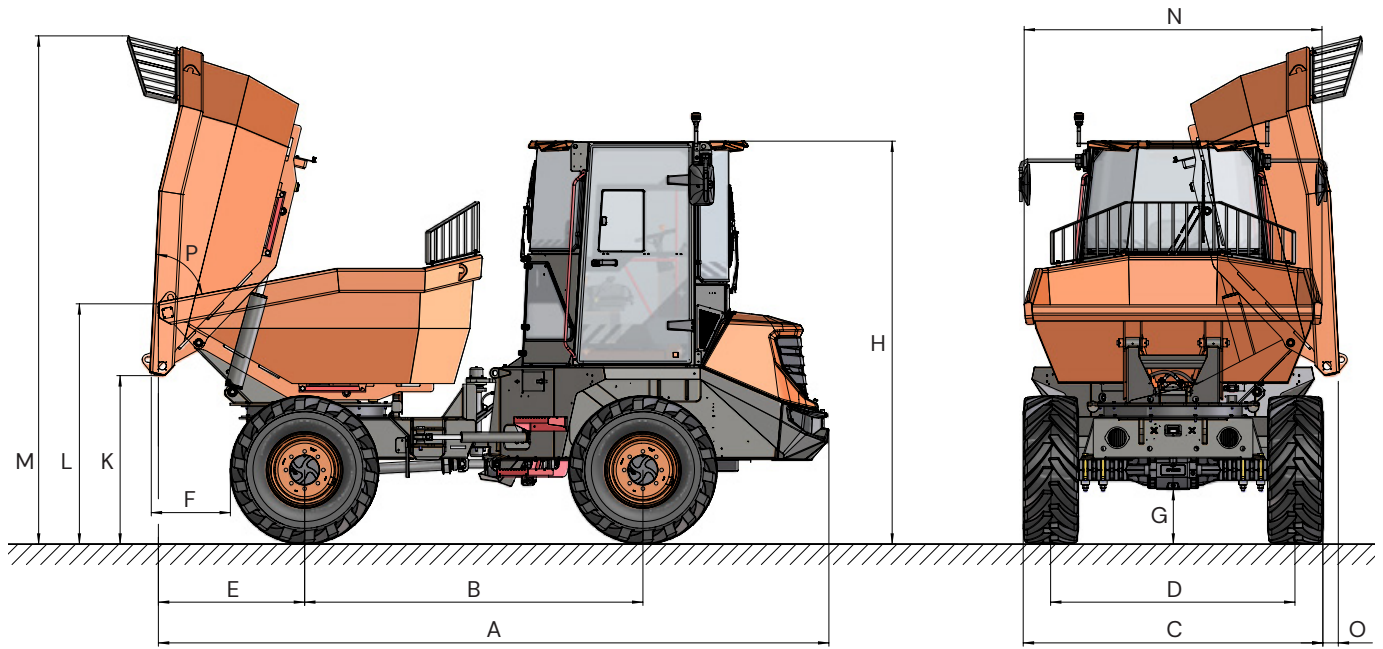

DIMENSIONS (mm)	DR902AHG
A	5050
B	2690
C	2440
D	1940
E	990
F	530
G	420
H	2990
I	-
J	-
K	1260
L	1875
M	3955
N	2290
O	150
DIMENSIONS (°)	
P	45

AUSA

www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.