




TECHNICAL DATA

| GENERAL | | D 201 AHG |
|-------------------------|---------|--|
| Unloading system | - | Rotating |
| Load capacity | lb | 4,400 |
| Chassis | - | Articulated and oscillating |
| Water hopper capacity | cu yd | 0.91 |
| Level hopper capacity | cu yd | 1.42 |
| Heaped hopper capacity | cu yd | 1.75 |
| Empty weight | lb | 4,592 |
| Transmission | - | Hydrostatic |
| ENGINE | | |
| Brand | - | KUBOTA |
| Model | - | V1505-E4B |
| Power | hp | 24.8 |
| Operating speed | rpm | 2,300 |
| Torque | N·m@rpm | 92.6@1,700 |
| No. of cylinders | - | 4 |
| Emissions | - | Tier4 |
| Injection | - | Mechanical pump |
| Noise | dB(A) | 101 |
| DRIVING | | |
| Max. speed | mph | 12.4 |
| Maximum gradient | % | 50 |
| External turning radius | in | 146 |
| Traction | - | 4x4 |
| Tyres | - | 10.0/75-15.3" |
| HYDRAULIC SYSTEM | | |
| Hydraulic circuit | - | 0.73 cu in gear pump |
| Flow rate | gal/min | 6.6 |
| Working pressure | psi | 2,900 |
| TANK CAPACITY | | |
| Fuel | gal | 9.9 |
| Hydraulic system | gal | 9.8 |
| BRAKES | | |
| Service | - | Hydrostatic, retention |
| Parking | - | Negative, integrated in the transfer box |

DIMENSIONS

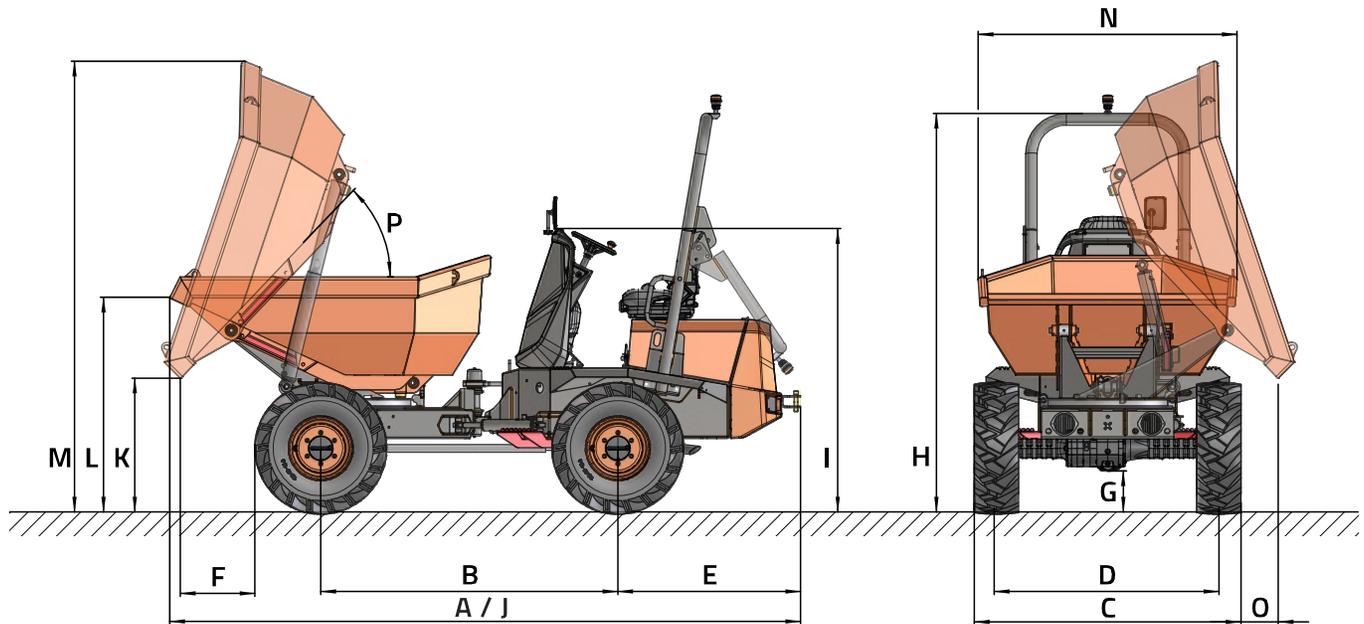

| DIMENSIONS (in) | D201AHG |
|-----------------|---------|
| A | 157.3 |
| B | 74 |
| C | 59 |
| D | 48.6 |
| E | 47.2 |
| F | 18.9 |
| G | 9.4 |
| H | 100.8 |
| I | 71 |
| J | 157.3 |
| K | 36.8 |
| L | 51.4 |
| M | 114.5 |
| N | 58.3 |
| O | 10.2 |
| DIMENSIONS (°) | |
| P | 49 |



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.