




TECHNICAL DATA

GENERAL		C 350 H x4
Load capacity to 500 mm	kg	3500
Load capacity to 600 mm	kg	3230
Unladen weight *	kg	5416
Transmission	-	Hydrostatic, with continuous speed control
MAST		
Fork carriage	-	FEM 3
Carriage width	mm	1260/1660
ENGINE		
Make	-	KUBOTA
Model	-	V2403-M-E3B
Power	kW	36,5
Operating speed	rpm	2600
Torque	N·m@rpm	158,6@1600
No. cylinders	-	4
Emissions	-	EU Stage IIIA + EPA/CARB Tier 4
Ambient noise	dB(A)	104
DRIVING		
Max. speed	km/h	21
Gradability	%	30
Traction	-	4x4 FullGrip®
Front tyres	-	16/70-20
Rear tyres	-	10.0/75-15.3
HYDRAULIC SYSTEM		
Hydraulic circuit	l/min	70
Working pressure	bar	190
TANK CAPACITY		
Fuel	l	80
Hydraulic	l	85
BRAKES		
Service	-	Hydraulic, multi-disc and sealed
Parking	-	Mechanical, multi-disc and sealed

* It may change due to optional equipment

DIMENSIONS

TYPE OF MAST	Maximum lift (mm)	H		Free lift (mm)	Load at maximum height (kg)	
		Retracted mast height (mm)	Extended mast height (mm)		Narrow axle	All-terrain use Wide axle
Duplex mast (Std.)	3300	2670	4570	120	3500	-
Triplex mast	3700	2130	4970	1200	3500	-
Triplex mast	5400	2700	6670	1680	-	1600

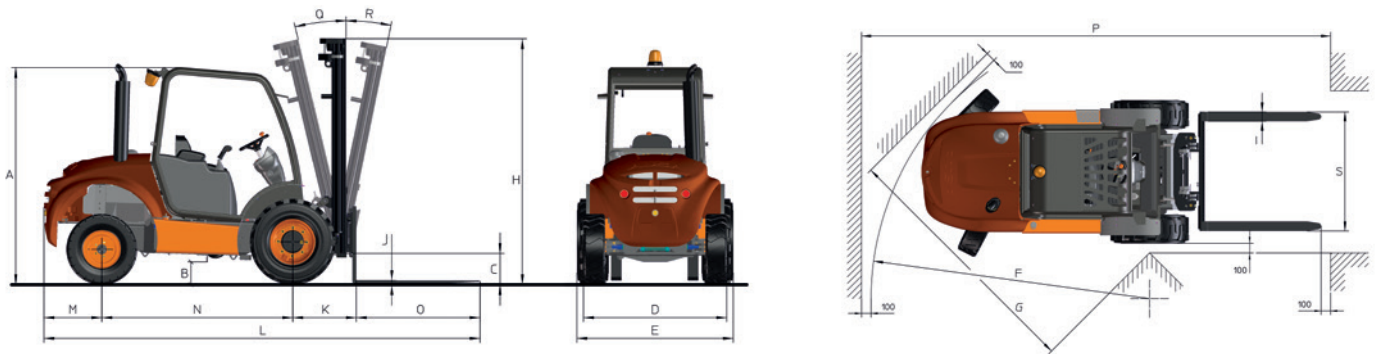

DIMENSIONS (mm)	C 350 H x4
A	2250
B	320
C	360
D	1547
E	1790
E**	2050
F	4350
G	2985
I	120
J	50
K	710
L	4560
M	630
N	2020
O	1200
P	6460
S	1260
S***	1660
DIMENSIONS (°)	
Q	14
R	11

** Measured with high-lift mast installed ***Measured for wide axle carriage



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.