




TECHNICAL DATA

GENERAL		D602AHG
Unloading system	-	Rotating
Load capacity	kg	6000
Chassis	-	Articulated and oscillating
Water hopper capacity	l	1665
Level hopper capacity	l	2455
Heaped hopper capacity	l	3154
Empty weight	kg	3880 / 3971* / 4147**
Transmission	-	Hydrostatic
ENGINE		
Brand	-	DEUTZ
Model	-	TD 2.9 L4 HT
Power	kW	55,4
Operating speed	rpm	2200
Torque	N-m@rpm	320@1600
No. of cylinders	-	4
Emissions	-	EU Stage V - US EPA Tier4
Injection	-	Common Rail
Exhaust aftertreatment	-	DPF (Diesel particulate filter)
Noise	dB(A)	101
DRIVING		
Max. speed	km/h	25
Maximum gradient	%	49
External turning radius	mm	6200
Traction	-	4x4
Tyres	-	405/70-20
HYDRAULIC SYSTEM		
Hydraulic circuit	-	25 cc and 22,5 cc double gear pump
Flow rate	l/min	50
Working pressure	bar	180
TANK CAPACITY		
Fuel	l	69
Hydraulic system	l	55
BRAKES		
Service	-	Sealed brakes with multiple discs in oil. Hydraulic drive
Parking	-	Negative brake and electro-hydraulic release

* With open cab ** With closed cab

DIMENSIONS

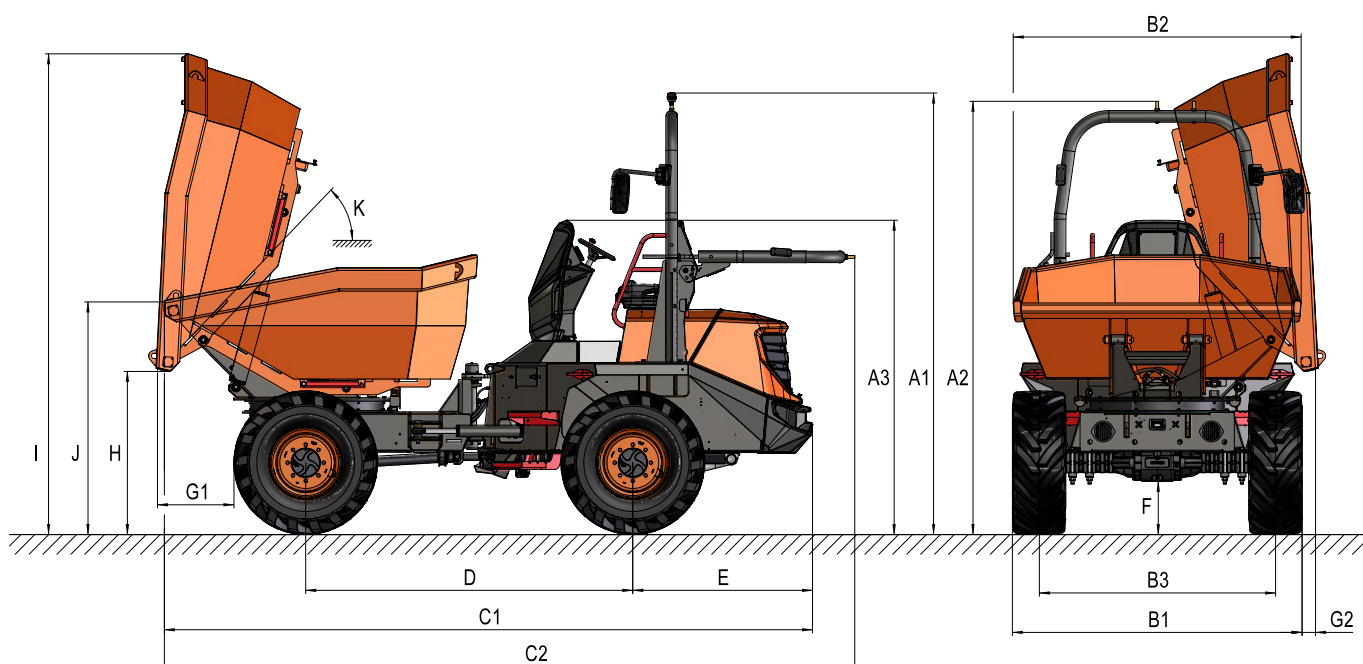

DIMENSIONS (mm)	D602AHG
A1	3340 / 3100* / 3160**
A2	3270 / 2970* / 2960**
A3	2400
B1	2210
B2	2200
B3	1800
C1	4940
C2	5260
D	2490
E	1370
F	400
G1	580
G2	110
H	1210
I	3640
J	1740
DIMENSIONS (°)	
K	45

* With open cab ** With closed cab

AUSA

www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.

MKCAT.D602AHG.EU.0926EN