




TECHNICAL DATA

GENERAL		C 350 H	C 350 H x4
Load capacity to 500 mm	kg	3500	3500
Load capacity to 600 mm	kg	3230	3230
Unladen weight *	kg	5416	5416
Transmission	-	Hydrostatic, with continuous speed control	Hydrostatic, with continuous speed control
MAST			
Fork carriage	-	FEM 3	FEM 3
Carriage width	mm	1260/1660	1260/1660
ENGINE			
Make	-	KUBOTA	KUBOTA
Model	-	V2403-M-E3B	V2403-M-E3B
Power	kW	36,5	36,5
Operating speed	rpm	2600	2600
Torque	N·m@rpm	158,6@1600	158,6@1600
No. cylinders	-	4	4
Emissions	-	EU Stage IIIA + EPA/CARB Tier 4	EU Stage IIIA + EPA/CARB Tier 4
Ambient noise	dB(A)	104	104
DRIVING			
Max. speed	km/h	21	21
Gradability	%	30	30
Traction	-	4x2	4x4 FullGrip®
Front tyres	-	16/70-20	16/70-20
Rear tyres	-	27x10-12	10.0/75-15.3
HYDRAULIC SYSTEM			
Hydraulic circuit	l/min	70	70
Working pressure	bar	190	190
TANK CAPACITY			
Fuel	l	80	80
Hydraulic	l	85	85
BRAKES			
Service	-	Hydraulic, multi-disc and sealed	Hydraulic, multi-disc and sealed
Parking	-	Mechanical, multi-disc and sealed	Mechanical, multi-disc and sealed

* It may change due to optional equipment

DIMENSIONS

TYPE OF MAST	Maximum lift (mm)	H		Free lift (mm)	Load at maximum height (kg)	
		Retracted mast height (mm)	Extended mast height (mm)		Narrow axle	All-terrain use Wide axle
Duplex mast (Std.)	3300	2670	4570	120	3500	-
Triplex mast	3700	2130	4970	1200	3500	-
Triplex mast	5400	2700	6670	1680	-	1600

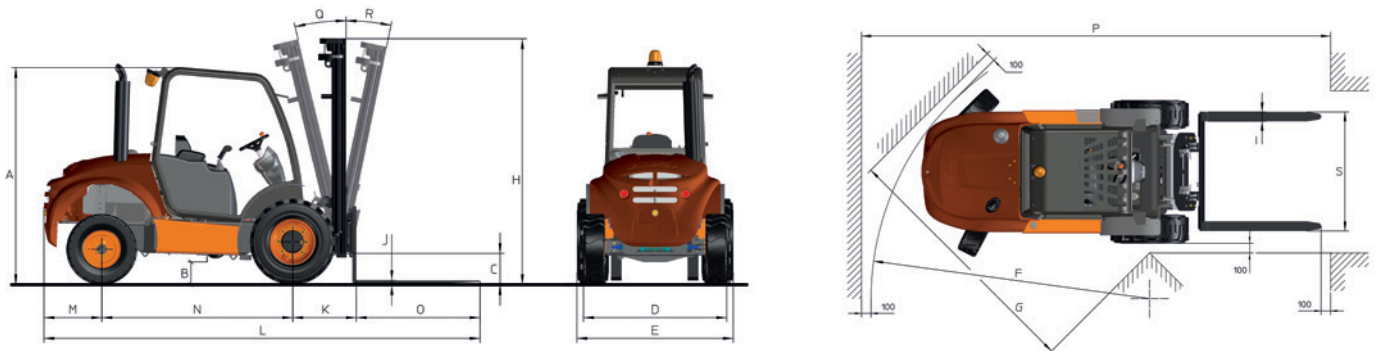

DIMENSIONS (mm)	C 350 H	C 350 H x4
A	2220	2250
B	300	320
C	375	360
D	1448	1547
E	1790	1790
E**	2050	2050
F	3500	4350
G	2945	2985
I	120	120
J	50	50
K	725	710
L	4585	4560
M	640	630
N	2020	2020
O	1200	1200
P	5625	6460
S	1260	1260
S***	1660	1660
DIMENSIONS (°)		
Q	14	14
R	11	11

** Measured with high-lift mast installed ***Measured for wide axle carriage



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.