




TECHNICAL DATA

GENERAL		C 150 H	C 150 H x4
Load capacity to 20"	lb	3,300	3,300
Load capacity to 24"	lb	3,000	3,000
Unladen weight *	lb	5,950	5,950
Transmission	-	2-speed hydrostatic	2-speed hydrostatic
MAST			
Fork carriage	-	FEM 2	FEM 2
Carriage width	in	49.6	49.6
ENGINE			
Make	-	KUBOTA	KUBOTA
Model	-	V1505-E4B	V1505-E4B
Power	hp	24.8	24.8
Operating speed	r/min	2300	2300
Torque	Nm@rpm	92.6@1700	92.6@1700
No. cylinders	-	4	4
Emissions	-	EPA/CARB Tier4, Stage V	EPA/CARB Tier4, Stage V
Ambient noise	dB(A)	101	101
DRIVING			
Max. speed	mph	12.4	12.4
Gradeability	%	25	25
Traction	-	4x2	4x4 Compen®
Front tires	-	10.0/75-15.3	10.0/75-15.3
Rear tires	-	6.00-9	23x8.5-12
HYDRAULIC SYSTEM			
Hydraulic circuit	gal/min	5.8	5.8
Working pressure	psi	2,900	2,900
TANK CAPACITY			
Fuel	gal	11.8	11.8
Hydraulic	gal	10.5	10.5
BRAKES			
Service	-	Hydraulic, multi-disc and sealed	Hydraulic, multi-disc and sealed
Parking	-	Mechanical, multi-disc and sealed	Mechanical, multi-disc and sealed

* It may change due to optional equipment

DIMENSIONS

TYPE OF MAST	Maximum lift (ft)	H Retracted mast height (in)	Extended mast height (in)	Free lift (in)	Load at maximum height (lb) All-terrain use
Duplex mast (Std.)	8.73	80.2	129.3	0	3.307
Triplex mast	13.12	77.7	183.8	53.5	2.645

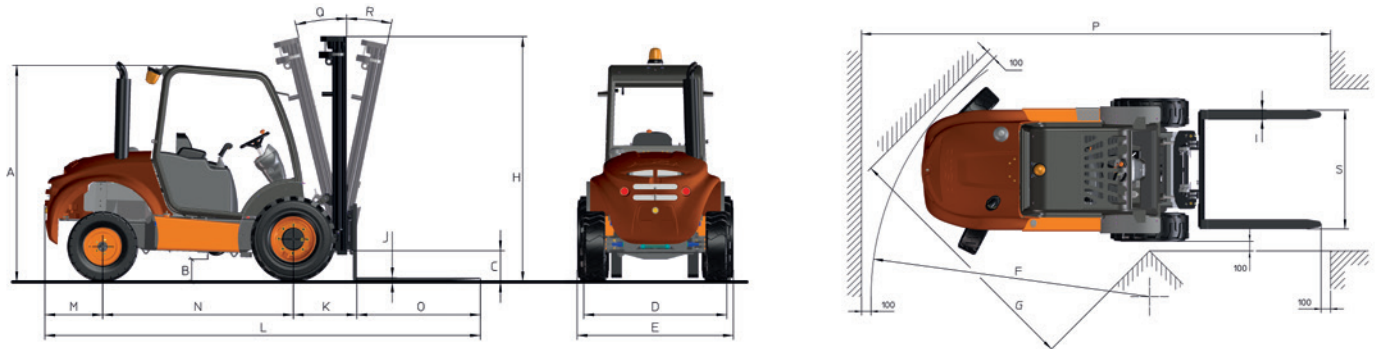

DIMENSIONS (in)	C 150 H	C 150 H x4
A	78.74	80.32
B	8.27	9.45
C	8.46	8.07
D	48.31	49.09
E	51.18	51.18
E**	51.18	51.18
F	101.18	157.48
G	95.28	98.43
I	3.94	3.94
J	1.38	1.38
K	20.08	20.08
L	142.91	142.91
M	16.73	15.35
N	67.32	68.50
O	39.37	39.37
P	168.50	224.80
S	49.61	49.61
S***	-	-
DIMENSIONS (°)		
Q	11	11
R	12	12



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.