




## TECHNICAL DATA

GENERAL		C 401 H x4
Load capacity to 24"	lb	8,800
Unladen weight *	lb	16,300
Transmission	-	Hydrostatic, with continuous speed control
MAST		
Fork carriage	-	FEM 3
Carriage width	in	65.3
ENGINE		
Make	-	DEUTZ
Model	-	TD3.6
Power	hp	74.3
Operating speed	r/min	2,200
Torque	N·m@rpm	330@1600
No. cylinders	-	4
Emissions	-	Tier 4
Ambient noise	dB(A)	104
DRIVING		
Max. speed	mph	12.4
Gradeability	%	35
Traction	-	4x4 FullGrip®
Front tires	-	18-19.5
Rear tires	-	12-16.5
HYDRAULIC SYSTEM		
Hydraulic circuit	gal/min	15.6
Working pressure	psi	3,408
TANK CAPACITY		
Fuel	gal	31.0
Hydraulic	gal	30.1
BRAKES		
Service	-	Hydraulic, multi-disc and sealed
Parking	-	Negativ, multi-disc and sealed

\* It may change due to optional equipment

## DIMENSIONS

TYPE OF MAST	Maximum lift (ft)	H Retracted mast height (in)	Extended mast height (in)	Free lift (in)	Load at maximum height (lb) All-terrain use
Duplex mast (Std.)	12.14	108.2	180.5	3.9	11,023
Triplex mast	13.94	92.5	207.1	54.8	8,818
Triplex mast	17.88	108.2	254.3	70.6	4,144

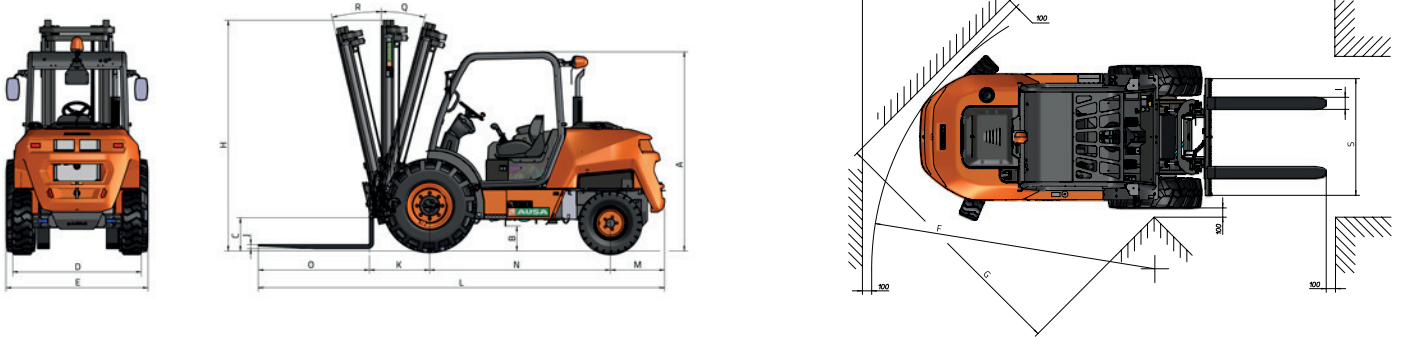

DIMENSIONS (in)	C 401 H x4
A	92,52
B	11,02
C	11,42
D	69,29
E	79,13
E*	79,13
F	173,62
G	126,38
I	4,72
J	1,97
K	28,35
L	181,50
M	25,20
N	80,71
O	47,24
P	253,15
S	65,35
S**	65,35
DIMENSIONS (°)	
Q	10
R	10

\* Measured with high-lift mast installed \*\*Measured for wide axle carriage



[www.ausa.com](http://www.ausa.com)

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.