




## TECHNICAL DATA

GENERAL		C 150 H M120	C 150 H x4 M121
Load capacity to 20"	lb	3,300	3,300
Load capacity to 24"	lb	3,000	3,000
Unladen weight *	lb	5,950	5,950
Transmission	-	2-speed hydrostatic	2-speed hydrostatic
MAST			
Fork carriage	-	FEM 2	FEM 2
Carriage width	in	1,260	1,260
ENGINE			
Make	-	KUBOTA	KUBOTA
Model	-	V1505-E4B	V1505-E4B
Power	hp	24.8	24.8
Operating speed	r/min	2300	2300
Torque	Nm@rpm	92.6@1700	92.6@1700
No. cylinders	-	4	4
Emissions	-	Stage V - EPA Tier4	Stage V - EPA Tier4
Ambient noise	dB(A)	101	101
DRIVING			
Max. speed	mph	12.4	12.4
Gradability	%	25	25
Traction	-	4x2	4x4 Compen®
Front tyres	-	10.0/75-15.3	10.0/75-15.3
Rear tyres	-	6.00-9	23x8.5-12
HYDRAULIC SYSTEM			
Hydraulic circuit	gal/min	5.8	5.8
Working pressure	psi	2,900	2,900
TANK CAPACITY			
Fuel	gal	11.8	11.8
Hydraulic	gal	10.5	10.5
BRAKES			
Service	-	Hydraulic, multi-disc and sealed	Hydraulic, multi-disc and sealed
Parking	-	Mechanical, multi-disc and sealed	Mechanical, multi-disc and sealed

\* It may change due to optional equipment

## DIMENSIONS

TYPE OF MAST	Maximum lift (ft)	H Retracted mast height (in)	Extended mast height (in)	Free lift (in)	Load at maximum height (lb) All-terrain use
Duplex mast (Std.)	8.73	80.2	129.3	0	3,307
Duplex mast	10.82	91.5	154.5	0	2,976
Triplex mast	13.12	77.7	183.8	53.5	2,645

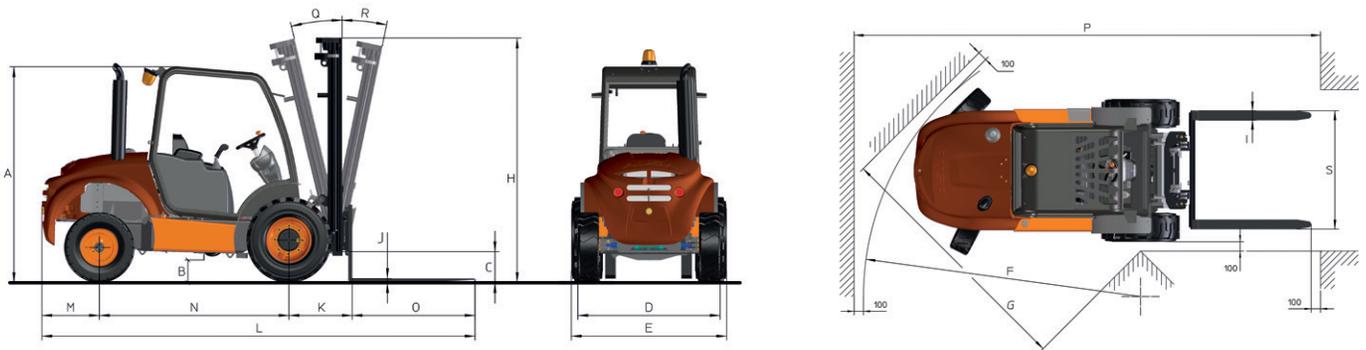

DIMENSIONS (in)	C 150 H	C 150 H x4
A	78.7	80.3
B	8.2	9.4
C	8,4	8
D	48.3	49
E	51.2	51.2
F	101.2	157.5
G	95.3	98.4
I	3.9	3.9
J	1.4	1.4
K	20	20
L	143	143
M	16,7	15.3
N	67.3	68.5
O	39.4	39.4
P	168.5	224.8
Q	0.4	0.4
R	0.5	0.5
S	49.6	49.6



[www.ause.com](http://www.ause.com)

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.