




TECHNICAL DATA

GENERAL		C 150 H	C 150 H x4
Load capacity to 500 mm	kg	1500	1500
Load capacity to 600 mm	kg	1350	1350
Unladen weight *	kg	2700	2700
Transmission	-	2-speed hydrostatic	2-speed hydrostatic
MAST			
Fork carriage	-	FEM 2	FEM 2
Carriage width	mm	1260	1260
ENGINE			
Make	-	KUBOTA	KUBOTA
Model	-	V1505-E4B	V1505-E4B
Power	kW	18.5	18.5
Operating speed	rpm	2300	2300
Torque	N·m@rpm	92,6@1700	92,6@1700
No. cylinders	-	4	4
Emissions	-	Stage V, EPA Tier 4	Stage V, EPA Tier 4
Ambient noise	dB(A)	101	101
DRIVING			
Max. speed	km/h	20	20
Gradability	%	25	25
Traction	-	4x2	4x4 Compen®
Front tyres	-	10.0/75-15.3	10.0/75-15.3
Rear tyres	-	6.00-9	23x8.5-12
HYDRAULIC SYSTEM			
Hydraulic circuit	-	Two gears pump	Two gears pump
Flow rate	l/min	22	22
Working pressure	bar	200	200
TANK CAPACITY			
Fuel	l	45	45
Hydraulic	l	40	40
BRAKES			
Service	-	Hydraulic, multi-disc and sealed	Hydraulic, multi-disc and sealed
Parking	-	Mechanical, multi-disc and sealed	Mechanical, multi-disc and sealed

* It may change due to optional equipment

DIMENSIONS

TYPE OF MAST	Maximum lift (mm)	H Retracted mast height (mm)	Extended mast height (mm)	Free lift (mm)	Load at maximum height @ 500 mm (kg) All-terrain use
Duplex mast (Std.)	2660	2040	3290	0	1500
Triplex mast	4000	1980	4670	1360	1200

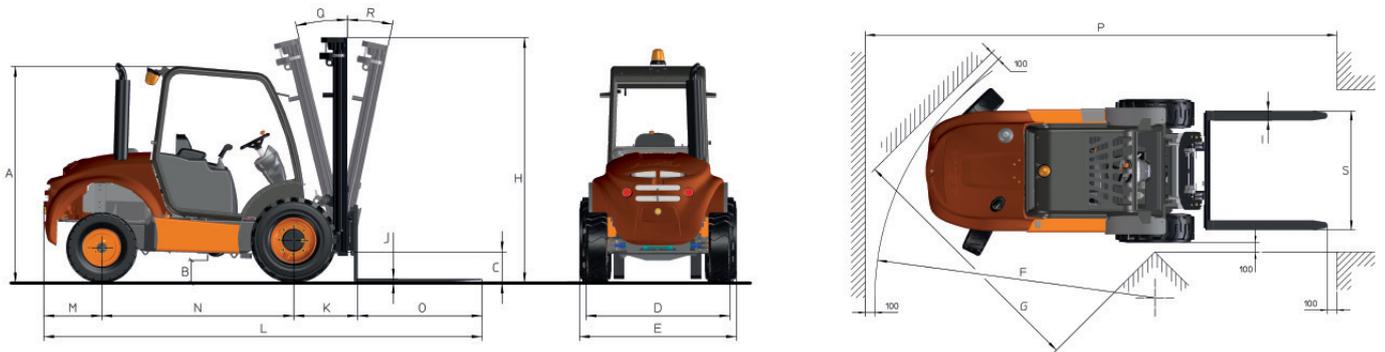

DIMENSIONS (mm)	C 150 H	C 150 H x4
A	2000	2040
B	210	240
C	215	205
D	1227	1247
E	1300	1300
E**	1300	1300
F	2570	4000
G	2420	2500
I	100	100
J	35	35
K	510	510
L	3630	3630
M	425	390
N	1710	1740
O	1000	1000
P	4280	5710
S	1260	1260
S***	1260	1260
DIMENSIONS (°)		
Q	11	11
R	12	12

** Measured with high-lift mast installed *** Measured for wide axle carriage



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.